


# HORIZONTAL SINGLE CLAMP POUCH PACKAGING MACHINE

Single point adjustable plow

Operator interface multi lingual for ease of use

Multiple fill stations

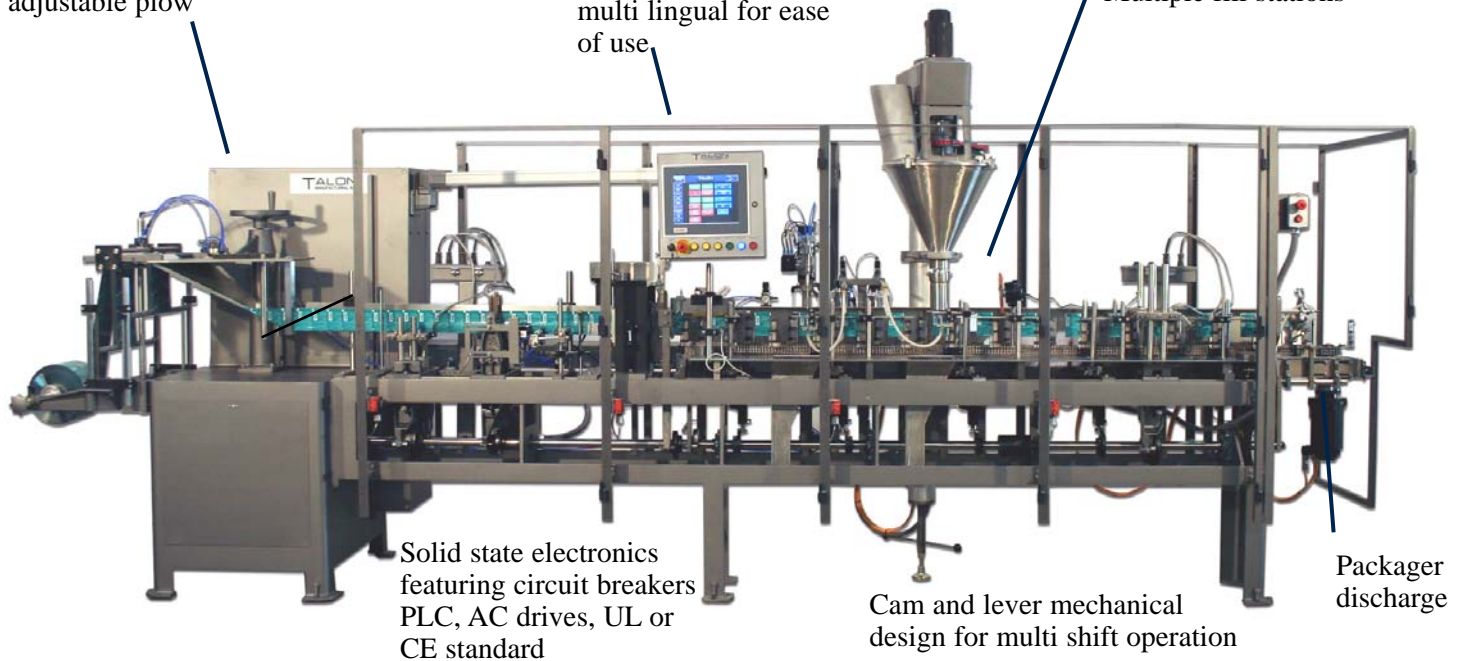

## SPECIFICATIONS

**Pouches Per Minute:** Maximum 100 ppm/200 ppm tandem

**Pouch Dimensions:**

Minimum - 2" (50 mm) wide x 2" (50 mm) tall  
Maximum - 7.75" (195 mm) wide x 9.5" (240 mm) tall  
Gussets up to 2" (50mm)

**Electrical Voltage:**

230 or 460V - 3 phase 60 Hz

**Product Fill Stations:**

Two standard

**Packaging Materials:**

Most heat sealable laminates

**Compressed Air Requirement:** 6 cfm at 90 psi

**Additional Options:**

- Easy open tear notcher
- Gusset web forming
- Film edge tracking
- Pouch size quick change
- Servo motor drive system
- Additional fill stations
- Zipper application
- Nitrogen flush
- Hanger Hole punch
- International voltage available

**Product Fill Options:**

- Powder, solids or liquids utilizing the following:
- Auger filler
- Combination weighing scales
- Volumetric filler
- Liquid filler
- Vibratory Filler
- Towlette Filler


**Manufactured by**  
**TALON MANUFACTURING, INC.**  
4294 Shoreline Drive • PO Box 278  
Spring Park, MN 55384 USA  
Phone 952-471-9379 • Fax 952-471-9414  
[www.talonmfg.com](http://www.talonmfg.com)

**Represented by**

# TALON

MANUFACTURING, INC.

## HORIZONTAL SINGLE CLAMP POUCH PACKAGING MACHINE

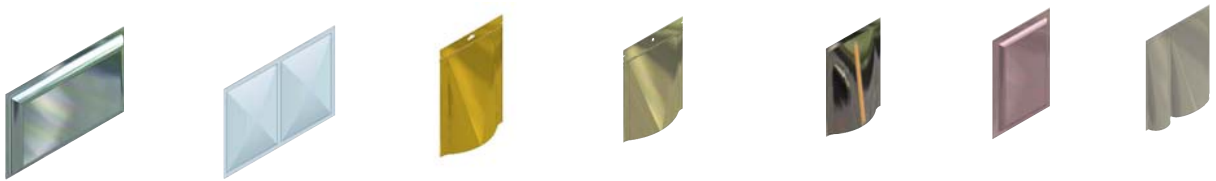

**Forms, Fills and Seals up to 100 pouches per minute**

